


25Hz GPS Module and Antenna.

If for 2022 you are using the new 25Hz GPS Module and Antenna, the Antenna needs to be positioned on the roof, behind the Air Intake Scoop.


The GPS Module plugs into the Chassis Loom, the same as the previous GPS Sensor and is positioned underneath the Dash.

An adjustment will need to be made in the Cosworth Pi Toolset Setup for this 25Hz GPS Module and Antenna.


First go the Home page and then click on '📡 NMEA 0183 Decode'.

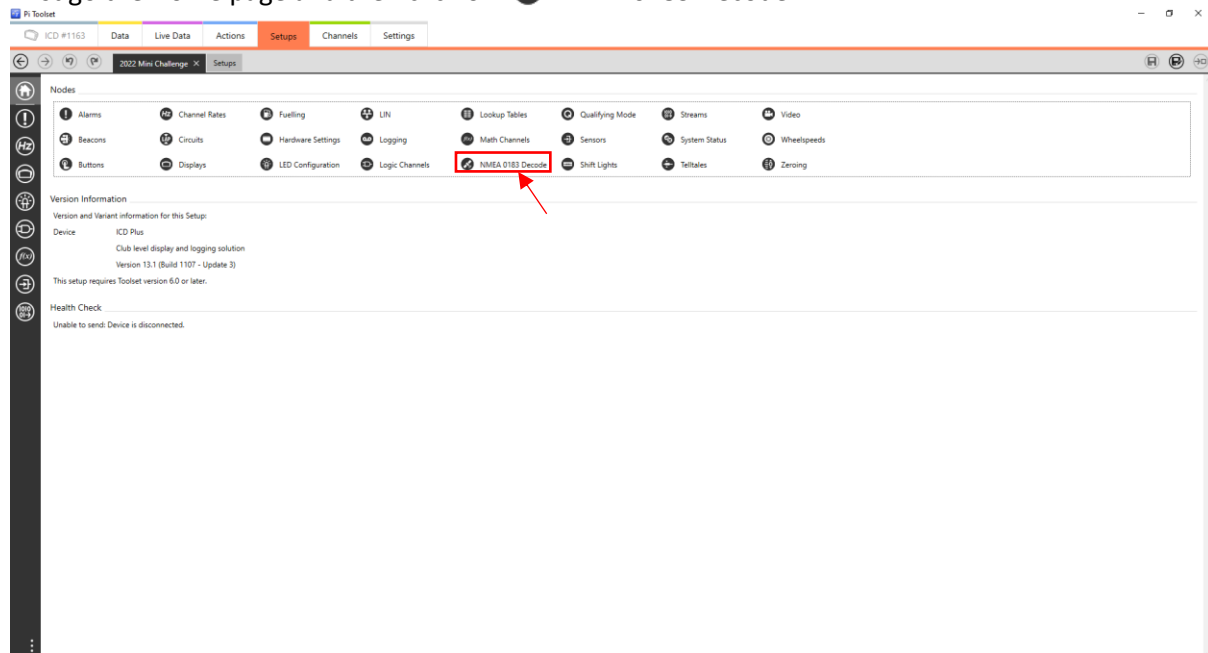

Click on the Settings Button.

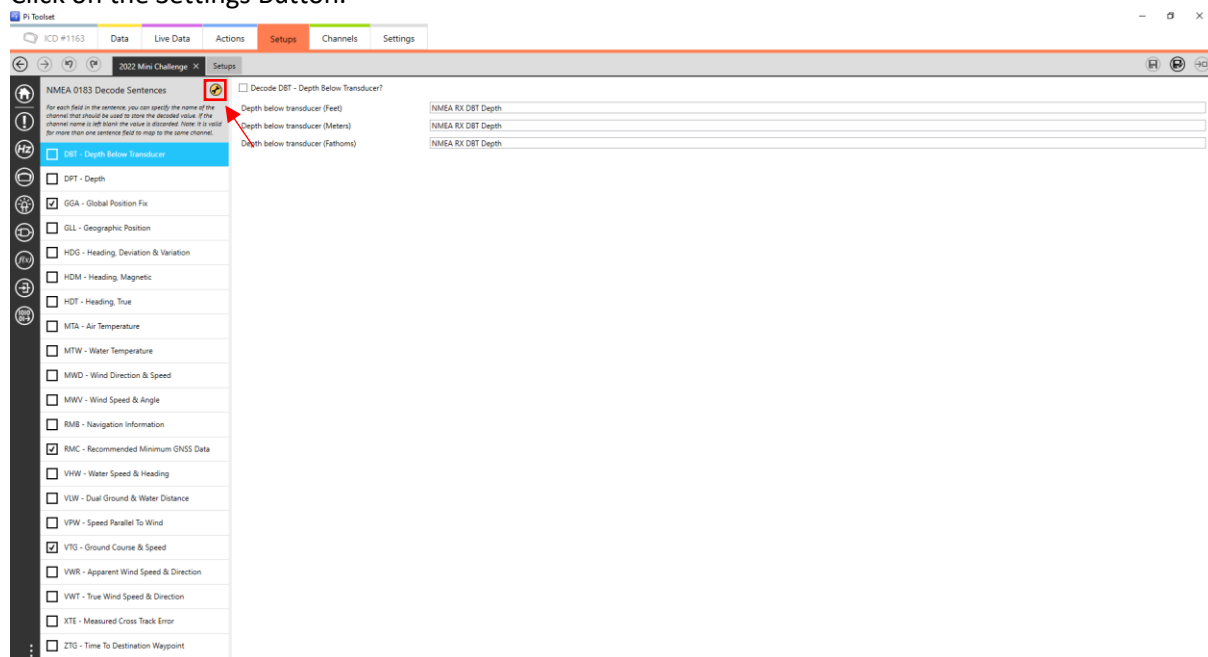

And change the Baud Rate to '115200'.

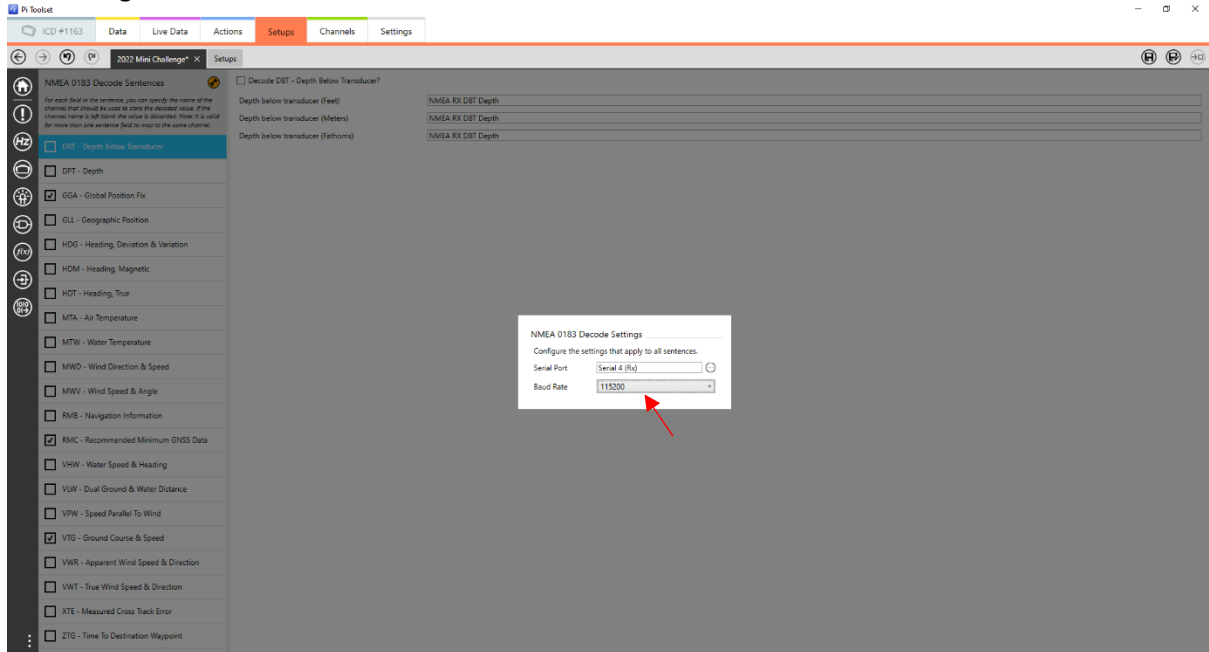

Then Save and Send to Device.

During operation:

When the device is first powered up the yellow LED will illuminate solid, as soon as the GPS has a fix (lock) on the minimum required number of Satellites, the yellow LED will begin to flash.